

QuickTrax® series

Compact and cost-effective
cable carriers in
two-component technology



Trademarks are legally protected for the TSUBAKI KABELSCHLEPP GmbH
as a national or international registration in the following countries:
tsubaki-kabelschlepp.com/Trademarks

Subject to change.



Inner
heights



Inner
widths



[tsubaki-kabelschlepp.com/
quicktrax](http://tsubaki-kabelschlepp.com/quicktrax)

- 1 Sturdy 2-component design: hard chain body, flexible film hinge
- 2 Plastic chain links
- 3 Extensive unsupported length
- 4 Inside space is gentle on the cables – no interfering edges
- 5 Very quiet through integrated noise damping
- 6 Quick and easy to open
- 7 Inside/outside openable
- 8 Dividers and height separations for cable separation
- 9 Single-part end connectors with and without integratable strain relief

Features

- Extremely fast and easy cable laying thanks to crossbar with film hinge
- Each chain link consists of two different materials:
 - Hard chain body made of glass-fibre reinforced material
 - Crossbar with flexible film hinge made of elastic special plastic
- Sturdy cable carrier design
- High torsional rigidity
- Very quiet through integrated noise damping
- Extensive unsupported length



Easy to open...



...even without tools



High side stability



Reliable cable separation

Type	Opening variant	Stay variant	h_i [mm]	h_G [mm]	B_i [mm]	B_k [mm]	B_i - grid [mm]	t [mm]	KR [mm]	Additional load ≤ [kg/m]	Cable- d _{max} [mm]
QT0320											
		030	20	25.5	15 – 65	27 – 77	–	32	28 – 125	3	16
		040	20	25.5	15 – 65	27 – 77	–	32	28 – 125	3	16

The two-component technology of the QT0320

The two-component technology of the **QT0320** combines two seemingly incompatible features: **Stability and flexibility**.

Cable carriers need to be extremely sturdy, with extensive unsupported length. At the same time, cables need to be inserted easily for fast cable laying.


The **QT0320** meets these requirements thanks to its innovative design and material combination of a hard cable carrier body made from glass fiber-reinforced material and crossbars with a film hinge made from rigid special plastic.



high flexibility



high stability

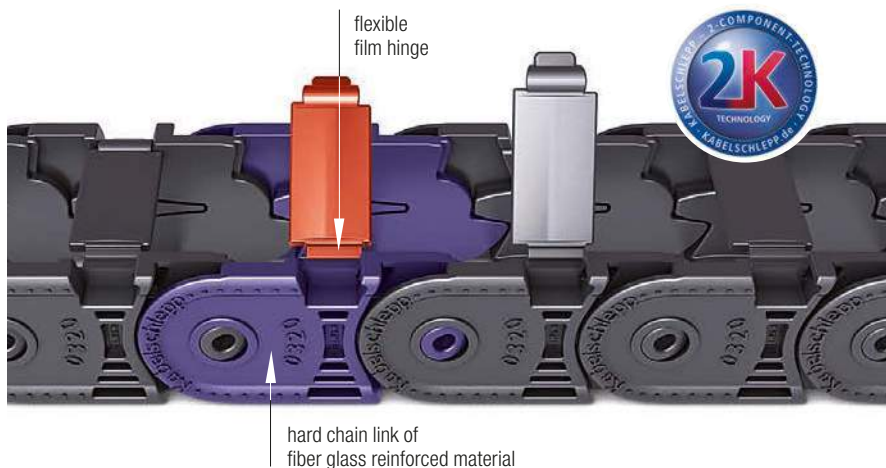

QuickTrax® series | Overview

Unsupported arrangement			Gliding arrangement			Inner distribution				Installation variants			Page
Travel length ≤ [m]	v_{max} ≤ [m/s]	a_{max} ≤ [m/s²]	Travel length ≤ [m]	v_{max} ≤ [m/s]	a_{max} ≤ [m/s²]	TS0	TS1	TS2	TS3	vertical hanging or standing	lying on the side	rotating arrangement	
2.9	10	50	80	2.5	25	●	●	–	–	●	●	●	130
2.9	10	50	–	–	–	●	●	–	–	●	●	●	131

Inner heights

20

Inner widths


15

65


Comparison of dimensions

Manufacturer	h_i [mm]	h_G [mm]	t [mm]	Identical connection hole pattern
QT0320	20.0	25.5	32.0	ja
Competitive product	17.5	23.0	30.5	ja

Comparison of bending moment

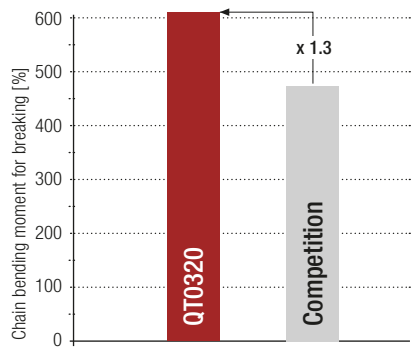

Comparison of bending strength

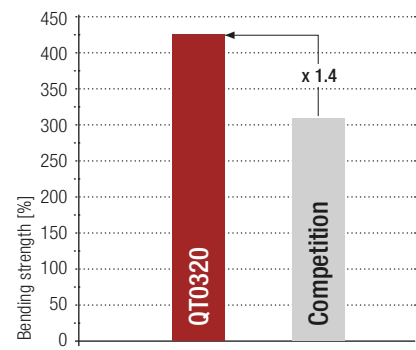

Advantages over competitive product

- 20 % longer unsupported length compared to competitive product
- 33 % greater additional load through use of fiber glass reinforced plastic
- Greater inner height
- Low noise operation due to internal damping system
- High side stability through locking in the stroke system
- Dividers can be used for cable separation

Subject to change.

tsubaki-kabelschlepp.com/
quicktrax

QT0320



Pitch
32 mm



Inner height
20 mm



Inner widths
15 – 65 mm



Bending radii
28 – 125 mm

Key for abbreviations
on page 12

Design guidelines
from page 60

Technical support:
technik@kabelschlepp.de

online-engineer.de
Cable Carrier Configurator

Stay variants



Design 030 page 130

Frame with outside opening crossbars

- Weight-optimised plastic frame with particularly high torsional rigidity.
- Crossbar can be opened at any position on one side.
- **Outside:** openable.



Design 040 page 131

Frame with inside opening crossbars

- Weight-optimised plastic frame with particularly high torsional rigidity.
- Crossbar can be opened at any position on one side.
- **Inside:** openable.

Inner heights

20


Inner widths

15
65

tsubaki-kabelschlepp.com/
quicktrax

QT0320 | Installation dim. | Unsupported · Gliding


Unsupported arrangement

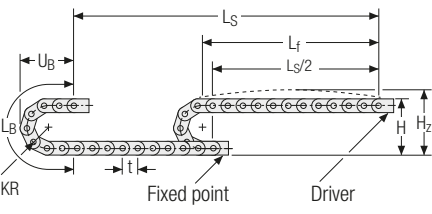

KR [mm]	H [mm]	H _z [mm]	L _B [mm]	U _B [mm]
28	81.5	101.5	152	73
38	101.5	121.5	184	83
48	121.5	141.5	215	93
75	175.5	195.5	300	120
100	225.5	245.5	379	145
125	275.5	295.5	457	170

Load diagram for unsupported length depending on the additional load.

Intrinsic cable carrier weight $q_k = 0.40 \text{ kg/m}$ with B1 38 mm. For other inner widths, the maximum additional load changes.

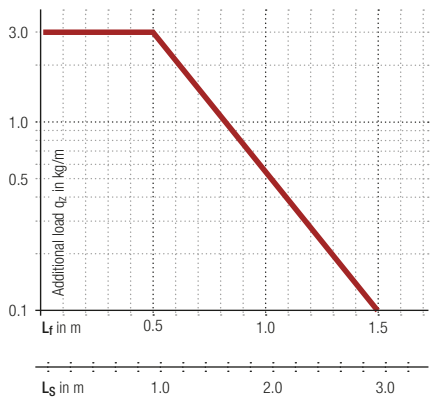

Speed
up to 10 m/s



Acceleration
up to 50 m/s²




Travel length
up to 2.9 m



Additional load
up to 3 kg/m

Gliding arrangement

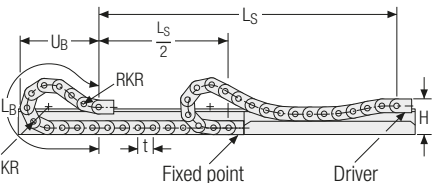

Speed
up to 2.5 m/s



Acceleration
up to 25 m/s²



Travel length
up to 80 m



Additional load
up to 3 kg/m



The gliding cable carrier must be guided in a channel. See p. 702.

Only design 030 can be used for a gliding arrangement.

Stay variant 030 – with outside opening crossbars


- Weight-optimised plastic frame with particularly high torsional rigidity.
- Crossbars can be opened at any position on one side
- **Outside:** openable.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 15 – 65 mm

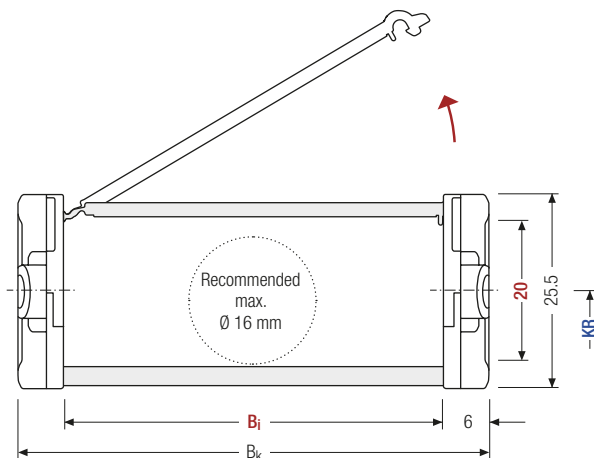

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L_k
rounded to pitch t

h_i [mm]	h_G [mm]	B_i [mm]					B_k [mm]	KR [mm]					q_k [kg/m]
20	25.5	15	25	38	50	65	$B_i + 12$	28	38	48	75	100 125	0.35 – 0.45

Order example



QT0320
Type

030
Stay variant

50
 B_i [mm]

100
 KR [mm]

1,280
 L_k [mm]

VS
Stay arrangement

Stay variant 040 – with inside opening crossbars

- Weight-optimised plastic frame with particularly high torsional rigidity.
- Crossbars can be opened at any position on one side
- **Inside:** openable.



Inner
heights




Inner
widths



Stay arrangement on each
chain link (**VS: fully-stayed**)



B_i 15 – 65 mm

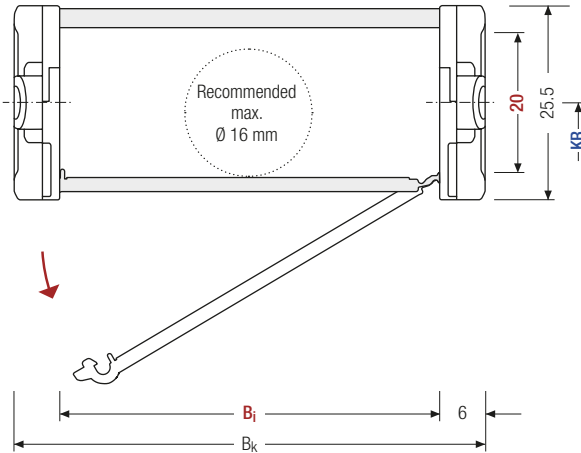

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L_k
rounded to pitch t

tsubaki-kabelschlepp.com/
quicktrax

h _i [mm]	h _G [mm]	B _i [mm]					B _k [mm]	KR [mm]					q _k [kg/m]	
20	25.5	15	25	38	50	65	B _i + 12	28	38	48	75	100	125	0.35 – 0.45

Order example



QT0320	040	50	100	1,280	VS
Type	Stay variant	B _i [mm]	KR [mm]	L _k [mm]	Stay arrangement

Divider systems


The divider system is mounted on each crossbar as a standard – on every 2nd chain link for stay mounting (HS).

As a standard, dividers or the complete divider system (dividers with height separations) are movable in the cross section (**version A**).

Divider system TS0 without height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	n _T min
A	4	8	6	–


The dividers can be moved in the cross section.

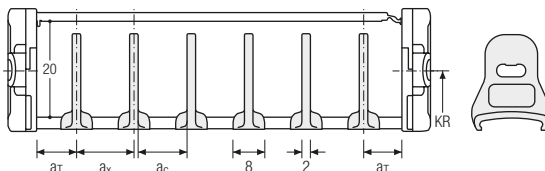

Divider system TS1 with continuous height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	n _T min
A	4	8	6	2

The dividers can be moved in the cross section.

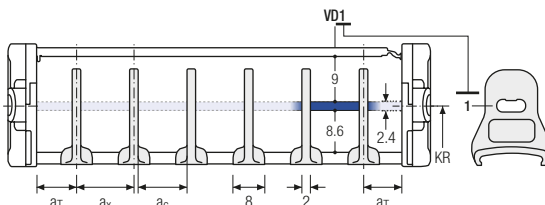

Order example




TS1	.	A	.	3	.	VD0
						⋮
						VD1

Divider system Version n_T Height separation

Please state the designation of the divider system (**TS0, TS1,...**), the version, and the number of dividers per cross section [n_T].

When using divider systems with height separation (**TS1**), please additionally state the position (e.g. VD1) viewed from the left driver belt. You are welcome to add a sketch to your order.




TRAXLINE® cables for cable carriers

Hi-flex electric cables which were specially developed, optimised and tested for use in cable carriers can be found at traxline.de.


QT0320 | End connectors

Single-part end connectors – plastic (with integrated strain relief)


The plastic end connectors can be connected **from above or below**. The connection type can be changed by altering the position of the end connector.




B_i: 25

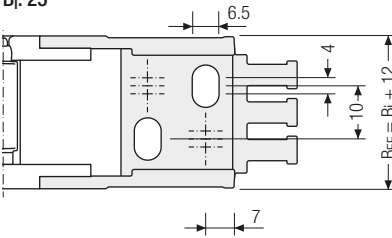

B_i: 15

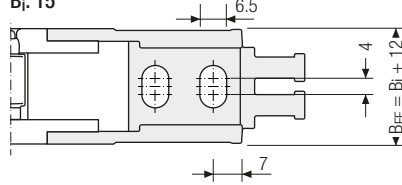

B_i: 38/50/65

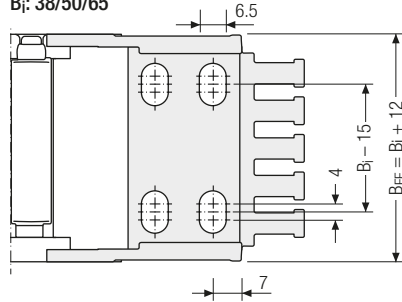


▲ Assembly options


B _i [mm]	B _{EF} [mm]	n _z
15	27	2
25	37	3
38	50	4
50	62	5
65	77	6



The end connectors can not be swivelled.



The end connectors are also available as an option **without** integrated strain relief. Please state when ordering.



Connection point

F – fixed point
M – driver

Connection type

A – threaded joint outside (standard)
I – threaded joint inside
H – threaded joint, rotated 90° to the outside
K – threaded joint, rotated 90° to the inside

Order example



End connector	.	F	A
End connector	.	M	A
End connector		Connection point	Connection type